# CEN

# CWA 18091

# **WORKSHOP**

April 2024

# **AGREEMENT**

ICS 43.120

### **English version**

# User centric charging infrastructure for electric vehicles -Charging stations of the future - Stations models considering users' expectations

This CEN Workshop Agreement has been drafted and approved by a Workshop of representatives of interested parties, the constitution of which is indicated in the foreword of this Workshop Agreement.

The formal process followed by the Workshop in the development of this Workshop Agreement has been endorsed by the National Members of CEN but neither the National Members of CEN nor the CEN-CENELEC Management Centre can be held accountable for the technical content of this CEN Workshop Agreement or possible conflicts with standards or legislation.

This CEN Workshop Agreement can in no way be held as being an official standard developed by CEN and its Members.

This CEN Workshop Agreement is publicly available as a reference document from the CEN Members National Standard Bodies.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

© 2024 All rights of exploitation in any form and by any means reserved worldwide for CEN national Members and for CEN/CENELE CENELEC Members.

#### Contents **Page** European foreword ......4 Introduction \_\_\_\_\_6 1 2 Normative references.......7 3 4.1 5 5.1 General......10 BM1 — Logistics Hubs ......11 5.2 BM2 — Citizens e-mobility stations ......12 5.3 BM3 — City Centre (park & charge).......12 5.4 5.5 5.6 6 6.1 7.1 The main features \_\_\_\_\_\_18 7.2 7.3 Business.......20 7.3.1 7.3.2 7.3.3 7.3.4 Urban station of the future ......21 8 8.1 Business 24 8.1.1 8.1.2 8.1.3 8.1.4 Value.......25 Highway station......25 9 9.1 The sketch.......25 9.2 9.3 Business 28 9.3.1 9.3.2 9.3.3 9.3.4 10 10.1 10.2 The main features 30 10.3

10.3.1 Business	
10.3.2 Market	32
10.3.3 Flow	
10.3.4 Value	
Bibliography	34

# **European foreword**

This CEN Workshop Agreement has been developed in accordance with the CEN-CENELEC Guide 29 "CEN/CENELEC Workshop Agreements – A rapid prototyping to standardization" and with the relevant provisions of CEN/CENELEC Internal Regulations - Part 2. It was approved by a Workshop of representatives of interested parties on 2023-11-29, the constitution of which was supported by CEN following the public call for participation made on 2023-07-07. However, this CEN Workshop Agreement does not necessarily include all relevant stakeholders.

The final text of this CEN Workshop Agreement was provided to CEN for publication on 2024-04-03.

Results incorporated in this CWA received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 875187.

The following organizations and individuals developed and approved this CEN Workshop Agreement:

- Ángel Moya (ETRA I+D), Chair.
- Juan Gimenez Pla (Instituto de Biomecánica de Valencia), Vice-Chair.
- Alberto Zambrano (ETRA I+D).
- Amparo López-Vicente (Instituto de Biomecánica de Valencia).
- Carol Soriano (Instituto de Biomecánica de Valencia).
- Fábián Zoltán Attila (Municipality of Budapest).
- Jayson Dong (ChargePoint).
- José Bernardo López Martínez (Murcia City Council).
- Juan Manuel Mico Soler (Power Electronics).
- Lars Balzer (Qwello GmbH).
- Luca Grzeski (Gewobag).
- Luka De Bruyckere (Environmental Coalition on Standards (ECOS)).
- María de la Cruz González Tudela (Murcia City Council).
- Marion Pignel (Eurocities).
- Mika Zaurin (CHAdeMO Association).
- Mourad Tiguercha (VEDECOM).
- Natascia Andrenacci (ENEA).
- Nico Frankhuizen (Rocsys).
- Orosz László (Municipality of Budapest).

- Ruud Pennings (The Royal Netherlands Standardization Institute).
- Tomoko Blech (CHAdeMO Association).
- Javier López Rodríguez (UNE), Secretary.

Attention is drawn to the possibility that some elements of this document may be subject to patent rights. CEN-CENELEC policy on patent rights is described in CEN-CENELEC Guide 8 "Guidelines for Implementation of the Common IPR Policy on Patent". CEN shall not be held responsible for identifying any or all such patent rights.

Although the Workshop parties have made every effort to ensure the reliability and accuracy of technical and non-technical descriptions, the Workshop is not able to guarantee, explicitly or implicitly, the correctness of this document. Anyone who applies this CEN Workshop Agreement shall be aware that neither the Workshop, nor CEN, can be held liable for damages or losses of any kind whatsoever. The use of this CEN Workshop Agreement does not relieve users of their responsibility for their own actions, and they apply this document at their own risk. The CEN Workshop Agreement should not be construed as legal advice authoritatively endorsed by CEN/CENELEC.

# Introduction

This document presents results generated in the USER-CHI project, a research and innovation project funded under European Union's program Horizon 2020, aimed at unlocking the massive potential of electromobility in Europe, from a user-centric perspective.

Following a user driven innovation approach, the project performed a deep qualitative and quantitative research of charging needs, demands and requirements of citizens and users in six different European countries: Norway, Finland, Hungary, Germany, Italy and Spain. As a result of this research work, subjective perception of charging options, decision influences and acceptance barriers have been analysed to define the innovative features and value-added services needed and expected in the next generation of future charging stations.

This CWA presents the four different stations envisaged by the project team to fulfil the needs and expectations of EV (Electric Vehicle) users (including LEVs, Light Electric Vehicles), according to the results obtained in the user research.

When considering the key aspects related to the charging process of an EV, the number of chargers and the availability of a dense charging infrastructure emerge as a critical aspect. Consequently, the quantity is important, but also qualitative aspects related to end user satisfaction. The charging stations models presented in this document also aim to cover qualitative aspects, such as:

- Better availability of charging facilities.
- Energy saving and greener environment.
- Standardization of core components.
- Ubiquitous and environmentally friendly.
- Diversified charging modes.
- Digital and intelligent charging.
- Tighter control for safety and privacy protection.
- Charging infrastructure is a node for multi-network convergence.

Besides software solutions offered by the OCPI protocol allowing for V2G and load balancing, alternative hardware-based solutions are also in development or already available. Alternative solutions comprise, amongst others, autonomous connection devices (ACD), AVP-guided parking systems, and inductive and conductive charging solutions. With connection options to all available sides of the vehicle.

# 1 Scope

This CWA provides guidelines for the stations of the future to fulfil the needs and expectations of Electric Vehicle (EV) users. This document includes design features for the charging stations that electromobility users demand, and recommendations for its successful deployment.

### 2 Normative references

There are no normative references in this document.

# 3 Terms and definitions

No terms and definitions are listed in this document.

# 4 User requirements and expectations

#### 4.1 General

Plug-in hybrid electric vehicles became the most popular type of passenger electric vehicles in the European Union in November 2020. This technological transition is supporting today the development of electromobility, but to foster a widespread use of electromobility, it is necessary to provide an appropriate charging infrastructure.

This document focuses on the definition of the charging stations that not only EVs and LEVs require, but also fulfil the needs and expectations of the end users. To achieve this, a qualitative and quantitative user research following the user experience principles has been performed, achieving a deep knowledge of EV drivers' charging preferences and patterns in order to increase their acceptance. As a result of this research, three categories of requirements have been identified:

## A) Must-be requirements:

- Availability of a dense charging point network in cities and in highways, including promoting the
  installation of charging points at drivers' home and in public parking lots. For professional
  drivers the city charging network is critical, while for private drivers the most critical point is
  charging when they arrive home, in private chargers or public chargers.
- A procedure for booking a charging point that ensures its availability when the driver arrives.

# B) Incremental gain requirements:

- Charging point status: occupied-unoccupied-in maintenance, blocked, charging, or reserved.
- Standardization of technical components and signalization.
- Paying with credit cards; contactless payment.
- Employing app utilities without subscription.
- Increase the amount of fast charging points; fast charge in highways.
- Automatic user detection in the charging point.
- Interoperability among charging points, at European level.
- A unique application for routing, booking and paying; pre-booking.

## C) Desirable requirements:

- Additional services to perform activities when charging the battery. Two aspects are differentiated:
  - Services at the urban charging points, like shopping malls or mobility hubs.
  - Services at charging points on route, in long range trips.
- Monitoring utilities like remaining charging time, percentage of charge in real time, power limitation to obtain a lower price, different criteria for fixing fees, or service interruption alarm, are interesting features for managing the waiting time when charging.
- Sustainability: users perceive electromobility as sustainable, and this value must be present in all the charging process.

These requirements are related to the charging process of an EV and should be included in a charging station aimed to achieve end users' expectations. Taking these requirements as entry requisites of a development process, four different concepts of stations of the future are defined:

- Intermodal station,
- Highway station,
- LEV chargers, and
- Urban station.

The main features related to each concept are presented in Table 1, organized in three categories:

- Technologies: this category refer to the main technological solutions to be included in the facilities of the concept design.
- Services / Users demands: this category refers to the services that end users are expecting to find, in order to cover their main demands.
- Location: this category refers to places that are likely to host an Intermodal station, with the described characteristics.

Table 1 — Main features of the Stations of the Future, organized in three topics

		Technologies	Services / User demands	Location
Intermodal station	Electric cars – eBikes – eScooters – Public transport	<ul> <li>Chargers for LEVs</li> <li>Shared electric scooters (eScooters), electricassist bicycles (eBikes) and electric mopeds.</li> <li>Slow chargers. Low power chargers (AC, DC, Inductive charging)</li> <li>Fast chargers (DC)</li> <li>(a)EVSE<sup>1)</sup></li> </ul>	<ul> <li>Standard and fast chargers</li> <li>Inductive charging for EVs + Maintenance + Parking lot</li> <li>Chargers for LEVs</li> <li>Intermodal ticketing point</li> <li>Cafeteria</li> <li>Toilets</li> </ul>	<ul> <li>Nature integrated</li> <li>Anti-theft / safe zona</li> <li>Railway station, city accesses, university campuses</li> <li>Big space is required</li> </ul>

		Technologies	Services / User demands	Location
		<ul> <li>Pay for charging (not parking), interchangeable payment method (credit cards; contactless payment; subscription, cash,)</li> <li>Rental and shared vehicle area</li> </ul>	<ul><li>Lockers &amp; Courier service</li><li>Coworking &amp; resting area</li></ul>	
Urban station	Electric cars – eBikes – eScooters - Electric vans	<ul> <li>Slow chargers (AC, DC)</li> <li>Fast chargers (DC)</li> <li>(a)EVSE</li> <li>Parking &amp; Charging booking</li> <li>Restricted access</li> <li>Interchangeable payment method (credit cards; contactless payment; subscription, cash,)</li> </ul>	<ul> <li>Parking &amp; Charging service for LEVs and EVs</li> <li>Lockers &amp; Courier service</li> <li>Logistics</li> <li>Short stays</li> <li>Loading/Unloading area</li> </ul>	<ul><li>City Center</li><li>Neighborhood</li><li>Shopping area</li></ul>
Highway station	Electric cars – Electric vans	<ul><li>Fast chargers (DC)</li><li>Charging booking</li><li>(a)EVSE</li></ul>	<ul> <li>Interchangeable payment method (credit cards; contactless payment; subscription, cash,)</li> <li>Cafeteria</li> <li>Toilets</li> <li>Coworking &amp; resting area</li> <li>Vehicle maintenance</li> <li>Playground / Physical activity</li> </ul>	- Highway
LEV chargers	eBikes – eSccoters – eMopeds	<ul> <li>Photovoltaic panels connected to grid</li> <li>Modularity</li> <li>Battery storage cabinets / Battery swapping</li> <li>AC chargers</li> <li>Charging booking</li> </ul>	<ul> <li>Secure parking</li> <li>Vertical parking</li> <li>Interchangeable payment method (credit cards; contactless payment; subscription, cash,)</li> </ul>	<ul> <li>Chargers in urban furniture, street lights and benches</li> <li>Bus canopies, underground</li> <li>University campus</li> </ul>

<sup>1)</sup> Automated (a) or manually operated Electric Vehicle Supply Equipment consisting of a single charger or combination of charger and automation connecting facility, allowing for conductive (AC & DC) or inductive charging.

### 5 Business models

#### 5.1 General

The growth of population mobility and an increased concern on climate change and energy independence have boosted interest in electric vehicles (EVs) as one way to address these challenges. The expansion of the public charging infrastructure network is a strategic component for promoting EVs, and with them dropping GHG emissions imputable to conventional cars and improving the local environment in terms of air pollution decrease.

To stay up-to-date with growing demand and address range-anxiety issues, charging infrastructure is required, mainly close to public transport hubs, at destination points, and along highways. Additionally, to adequately profit from the flexibility of EVs while facilitating the stability of the energy system, the infrastructure should be deployed in combination with grid edge technologies – such as decentralised generation, storage, microgrids and smart buildings – and integrated into smart grids.

As the share of kilometres driven by EVs rises, urban mobility emissions will gradually reduce. Moreover, electrification combined with a clean energy mix and optimised charging patterns will further decrease emissions and enhance air quality to ameliorate the ecological footprint.

Finally, smart-charging services will reduce charging costs, while they can create new revenue streams in the energy markets for Charge Point Operators (CPOs) and E-Mobility Service Providers (EMSPs) able to provide ancillary services.

For these reasons different areas of impact have to be considered and in all the cases with a focus on the project partner cities that have expressed interest in the specific business model case. Business cases have to be calibrated considering variables such as scalability of the infrastructure, demand and market management programs, environmental context, presence or not of relevant e-Mobility operators, etc.

Traditional business models are developed with profit as the overarching aim. Sustainable Business Models (SBMs) aim to broaden the definition of value creation by integrating social and environmental performance dimensions besides the primary fabric of business. SBMs are thus defined in terms of their ability to internalise these three sustainability dimensions into the core of business.

Social and environmental values are desirable from a collective point of view. Still, it is often unclear how private organisations can capture this type of value while preserving economic sustainability. This is a relevant question mark that has to be taken into high consideration for the business modelling generation process of (a) EVSE

Therefore, business models should be analysed and defined considering different environmental scenarios and adopting a multi-stakeholder approach, specifying for each demo city interested in the BM: the market characteristics, market trends, market limits and constraints, target clients and their profile, market size and business opportunities to make them viable, attractive, and economically sustainable.

For the purpose of this document seven business models related to the charging process of EVs have been defined:

- BM1 Logistics Hubs.
- BM2 Citizens e-mobility stations.
- BM3 City Centre (park & charge).
- BM4 E-trucks.
- BM5 E-taxi stops.
- BM6 Special events.

BM7 — Mobile Charging Stations.

The main features of the business models are melted employing the well-known CANVAS business model developed by Osterwalder  $^{1}$ ). The most relevant features of the business model related to each conceptual station are presented in a new reduced format, including four topics:

- The Business, bringing together the upper left side of the business model chart (Key Partners, Key Activities and Key Resources).
- The Market, bringing together the upper right side of the business model chart (Customer Segments, Customer Relationship and Channels).
- The flow, bringing together the lower boxes of the business model chart (Revenue Streams and Costs Structure).
- The Value, the central part of the chart, presented as it appears in the business model chart.

# 5.2 BM1 — Logistics Hubs

The digitalisation and electrification of logistics is one of the top treated topics in relation to the environmental impacts of transport, especially in the recent years with the growing of international logistics demand due to e-commerce business. The subject involves all the three main sectors characterising the business: supply, storage, and last mile distribution.

In this operational and market context, Logistics Hubs represents a business case proposing recharging services addressed to logistics or mobility operators working in (or accessing to a) shared infrastructure.

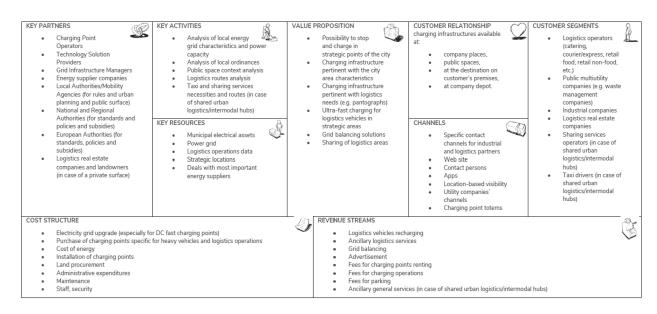


Figure 1 — Logistics Hubs CANVAS

<sup>1)</sup> Osterwalder, A., Pigneur, Y., Business Model Generation, John Wiley & Sons Inc, 2010.

# 5.3 BM2 — Citizens e-mobility stations

Mobility stations aim to provide the most suitable means of transport at any time and any place in order to reduce private vehicle ownership of residents and customers. They combine and provide different transport modalities in a unique hub.

The concept is to find in the same location several mobility technologies (car-sharing both stationary and free-floating, scooters, normal bikes and cargo bikes) connected with public transport and ancillary services (e.g. Wi-Fi, toilettes, cafeteria, or bike repairing).

In the most sophisticated and advanced mobility hub, these services can include electromobility: different zero-emission and shared transport modes available and linked together in a network.

In this operational and market context, *Citizens e-mobility stations* represents a business case addressing e-Mobility Stations and proposing recharging services addressed to e-drivers (private or professional), to logistics and/or mobility operators working in (or accessing to a) mobility hub.

The following table represents the CANVAS of the identified business model.

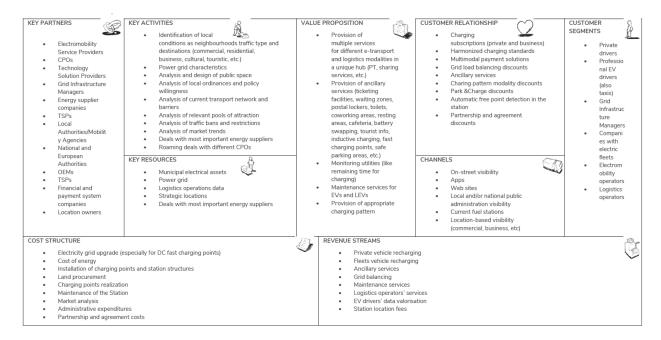


Figure 2 — Citizens e-Mobility Stations CANVAS

# 5.4 BM3 — City Centre (park & charge)

To increase the EV drivers' satisfaction level concerning the current public charging infrastructures, different actions can be undertaken, among which, for example: allowing e- drivers to find out where they can charge easily, simplifying the EV charging buying process, supporting EV drivers in being involved with local EV communities, or disseminating the utility or city programs concerning EV charge points.

To accelerate the DC fast charging deployment, two are the point to follow first: to develop infrastructure for intercity travels where drivers, travelling between cities, do not have time to spend for charging the vehicle; to focus on drivers who do not have access to home or work charging.

In this operational and market context *City Centre (park & charge)* represents a business case addressing park & charge and proposing recharging services addressed to citizens and e-drivers travelling within the urban context with electric vehicles.

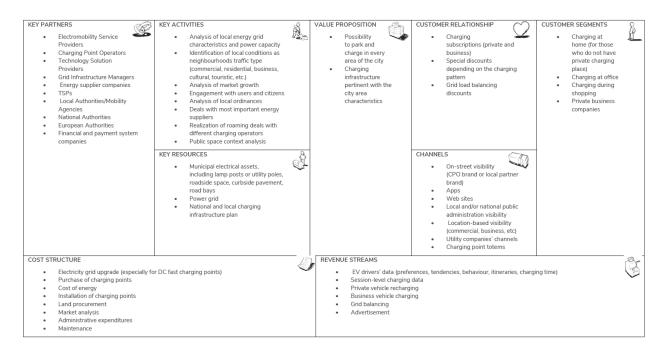


Figure 3 — City Centre (park & charge) CANVAS

#### 5.5 BM4 — E-trucks

Diesel power is still king in trucking and will be it for a long time. But both public administrations and industry leaders show a huge pull and interest in market electrification.

In recent years, the exploration of near-silent, low-maintenance, battery-powered trucks and the related infrastructure is a consistent theme in logistics. The number of electric delivery trucks and vans presented and announced by manufacturers gives the impression that finally, the sector is getting to a tipping point.

In this operational and market context *E-trucks* represents a business case addressing e-truck sector and proposing recharging services addressed to transport and mobility operators working with electric light and heavy logistics vehicles.

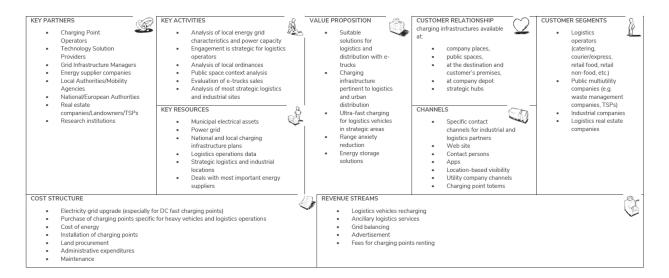


Figure 4 — E-trucks CANVAS

# 5.6 BM5 — E-taxi stops

There are different characteristics of the electric powertrain, if compared to the Internal Combustion Engine Vehicles (ICEVs), that seem particularly attractive for the urban environments: zero tailpipe emissions, higher energy efficiency and silent operations. For this reason, in recent years, many countries have laid out plans to ban or severely limit access to ICEVs (especially diesel vehicles) in urban areas in the coming years.

This mindset shift, combined with the constantly decreasing cost of batteries and an increased supply of Battery Electric Vehicles (BEVs) in previously underserved vehicle classes, is paving the way for a fast transition towards zero-emission vehicles such as BEVs. In this framework, organisations with large vehicle fleets that are intensively used, such as taxi companies, could be important players in the transition towards cleaner means of transport. This concerns not only taxi vehicles, but also their management systems, which are an important part of the sustainable urban transport ecosystem.

In this operational and market context *E-taxi stops* represents a business case addressing e-taxis and proposing recharging services addressed to their operational necessities.

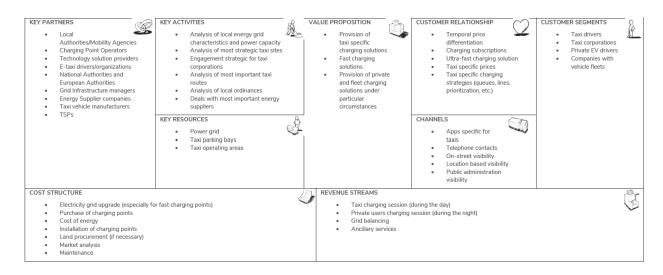


Figure 5 — E-taxi stops CANVAS

# 6 BM6 — Special events

Electric vehicle (EV) numbers are growing at an exponential pace and are pushing the market and business necessities to find out different solutions for providing necessary energies to all potential situations, either normal or special ones, such as out of routine regimes like emergency cases, or occasional events (e.g. sport and fair events, conferences, or congresses).

The growth of the market and the evolution in EV technology are moving to a new face of the "range anxiety" that characterizes electric drivers: the ability to find a way to charge up when the planned route does not go exactly according to the plans22. The new pivotal question is no more oriented to vehicle abilities and characteristics but around the lack of infrastructure and its ability to provide services on all occasions of moving, daily or extraordinary.

With extraordinary circumstances, it is not meant only emergencies or catastrophes, but also events out of normal and daily utilization of electric vehicles.

In this operational and market context *Special events* represents a business case addressing singular events and proposing recharging services for e-drivers travelling during extraordinary situations.

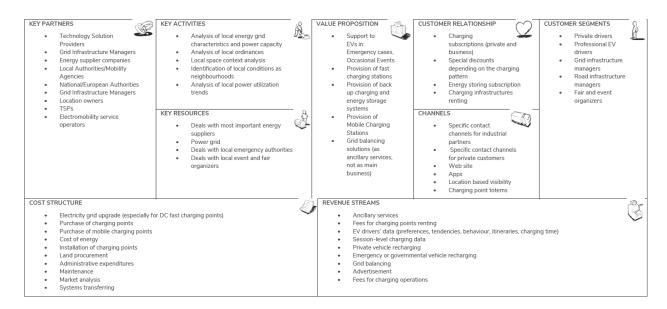


Figure 6 — Special events CANVAS

# 6.1 BM7 - Mobile Charging Stations

Electric vehicles (EVs) adoption and charging infrastructure implementation are not growing in a parallel way. If there is a remarkable growing of the EV market share, the related necessary recharging infrastructure is not growing with the same pace. There are still gaps – places without chargers that could be served if EV charging was available.

Today battery swapping and wireless charging lanes are only occasionally utilized. Consequently, to date, the most promising solution is the Mobile Charging Stations (MCSs), an option that can serve EV charging in a portable, flexible, and put-on wheels manner.

The ability of MCSs to provide charging services without time and location constraints could give them a prominent role to accelerate EV penetration.

In this operational and market context *Mobile Charging Stations* represents a business case addressing portable charging stations and proposing recharging solutions for exploiting the potentialities and benefits derived by using MCSs.

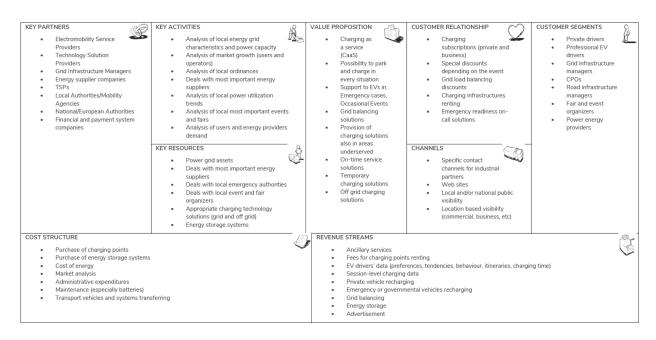


Figure 7 — Mobile Charging Stations CANVAS

### 7 Intermodal station of the future

### 7.1 The sketch

This sketch presents a charging station to support multimodal mobility in the cities. The concept combines different transport modes (communal and particular, public and private), in a big facility.

The concept design for the intermodal station should provide the flowing services that electric cars, eBikes, eScooter and public transport users' demand:

- Standard and fast chargers.
- Inductive charging for EVs, vehicle maintenance and parking lot.
- Chargers for LEVs.
- Intermodal ticketing point.
- Cafeteria.
- Toilets.
- Lockers and courier service.
- Coworking and resting area.

The following picture shows and example of the concept design for the intermodal station.



Figure 8 — Concept design for the Intermodal station

### 7.2 The main features

According to stations' main features presented in Table 1 the following technologies should be included in the intermodal station concept design:

- Chargers for LEVs.
- Shared electric scooters (eScooters), electric-assist bicycles (eBikes) and electric mopeds.
- Slow chargers. Low power chargers (AC, DC, Inductive charging).
- V2G abling technologies.
- (a)EVSE.
- Fast chargers (DC).
- Pay for charging (not parking), interchangeable payment method (credit cards; contactless payment; subscription, cash, ...).
- Rental and shared vehicle area.

The intermodal station's locations require a big space. The location where the station should be installed in an anti-theft and safe zona and be integrated with the nature. The intermodal station should be located close to railway stations, city accesses and university campuses.

The following figure shows the main features of the intermodal station grouped in the three categories.

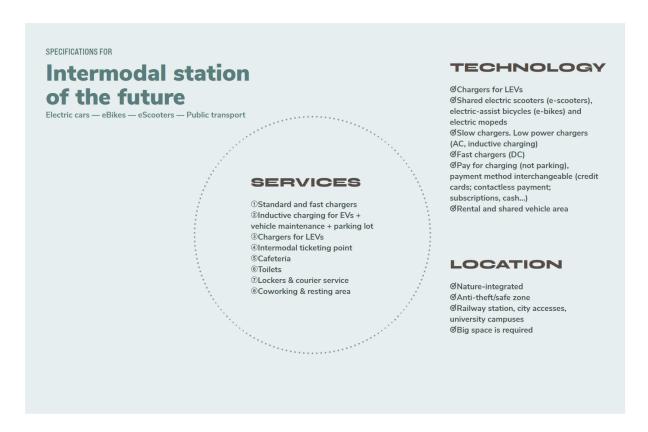


Figure 9 — Main features of the Intermodal station

## 7.3 The business model

According to the seven business models related to the charging process of EVs defined, the concept design of the Intermodal station does not match exactly with one of these business models, but the concept is related, at a different level, with various of these models.

From the business model point of view, the Intermodal station of the future is a logistic hub, a station hosting different transport modes, a station offering services of park&charge and taxi. For this reason, a combination of several business is applicable.

- BM1 Logistics Hubs.
- BM2 Citizen e-Mobility Station.
- BM3 City Centre (Park&Charge).
- BM5 e-Taxi Stops.

The following figure represents the CANVAS of the business model for the Intermodal station highlighting the most relevant aspects.

KEY PARTNERS	KEY ACTIVITIES	VALUE PROPOSITION	CUSTOMER RELATIONSHIP	CUSTOMER SEGMENTS
<b>Electromobility Service Providers</b>	Analysis of relevant pools of attraction	(SERVICES)	Different payment solutions	Private drivers
CPOs	Power grid characteristics	To stop and charge in strategic intermodal	Charging subscriptions	Professional EV drivers (also taxis)
Technology Solution Providers	Analysis and design of public space	locations	Parking&charging booking	PT companies
Grid Infrastructure Managers	Analysis of local ordinances and policy willingness	Standard, fast, and ultra fast chargers	Harmonized charging standards	Sharing mobility providers
Energy supplier companies	Analysis of current transport network and barriers	Inductive charging	Providers roaming solutions	Electromobility providers
TSPs	Analysis of market trends	Battery swap	Park&charge discounts	Logistics operators
Local Authorities/Mobility Agencies	Deals with most important energy suppliers	Vehicles maintenance	Automatic free point detection	
National and European Authorities	Roaming deals with different CPOs	Parking lots	Taxi parking&charging points	
OEMs		Pay for charging (not parking)	Logistics parking&charging points	
Financial and payment system		Rental and shared mobility services	PT parking and charging areas	
companies		Chargers for LEVs	Provision of private and fleet charging solutions	
Taxi corporations		Intermodal ticketing	Grid load balancing discounts	
Taxi vehicle manufacturers	KEY RESOURCES  Municipal electrical assets Logistics operations data  Strategic locations  National and local charging infrastructure plan	Cafeteria Toilets Lockers, courier and logistics services Sharing of logistics areas Coworking & resting areas Grid balancing solutions Energy storage solutions	CHANNELS Specific channels for industrial and logistics Strategic transport location visibility Apps Web sites Local and/for national public administration visibility Utility companies' channels	
COST STRUCTURE		REVEUE STREAMS		
Electricity grid upgrade (especially for DC fast charging points if needed in the intermodal point)		Logistics vehicles recharging		
		Private vehicles recharging		
Charging point installation		Business vehicles charging		
		Fees for parking		
		Maintenance services		
		Ancillary general services		
		Ancillary logistics services		
		Grid balancing		
		Advertisement		
EV drivers' data (preferences, tendencies, behaviour, itineraries, charging time)				

 ${\bf Figure~10-Most~relevant~features~of~the~combined~BMs,~considered~in~the~Intermodal~station} \\ {\bf concept}$ 

#### 7.3.1 Business

The business represented in the upper left side of the CANVAS business model is composed by the key partners, activities and resources.

The key partners of the intermodal station are electromobility service providers, CPOs, grid infrastructure managers and energy supplier companies.

The main activities and resources of the intermodal station are power grid characteristics, deals with most important energy suppliers, roaming deals with different CPOs and strategic locations.

#### **7.3.2 Market**

The market represented in the upper right side of the business model chart is composed by the customer segments and relationship and the channels.

The market of the intermodal station is segmented in private drivers, PT companies, electromobility providers and logistics operators.

The most used channel of the intermodal station is through Apps and the harmonized charging standards and providers roaming solutions are the basics of customer relationship.

#### 7.3.3 Flow

The flow represented in the lower boxes of the business model chart is composed by the revenue streams and the costs' structure.

The electricity grid upgrade, the charging point installation, the land setting and adaptation and the maintenance are the main costs' structure of the intermodal station.

The main sources of income of the intermodal station come from private vehicles recharging, business vehicles charging, maintenance services, ancillary general services, ancillary logistics services and the EV drivers' data.

#### 7.3.4 Value

The value is represented in the central part of the CANVAS business model.

The main value that the intermodal station provides is to stop and charge in strategic intermodal locations, standard, fast, and ultra-fast chargers, vehicles maintenance, rental and shared mobility services, intermodal ticketing, lockers, courier and logistics services, sharing of logistics areas, coworking & resting areas, grid balancing solutions and energy storage solutions.

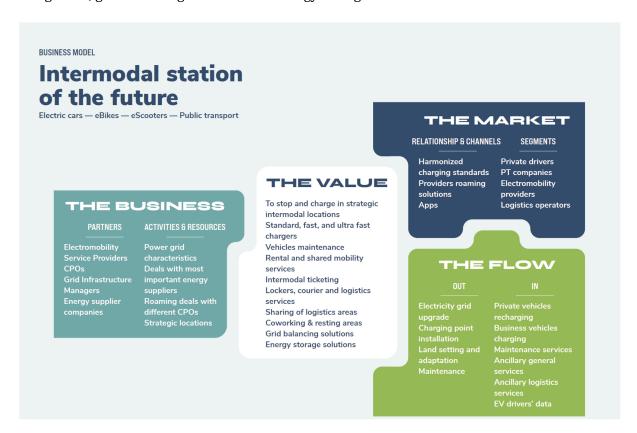


Figure 11 — Business model related to Intermodal station

### 8 Urban station of the future

## 8.1 The Sketch

This sketch presents a charging station adapted to the requirements of a city centre: adaptation to existing infrastructures and space optimization. The concept combines charging and parking services, addressed to end users and logistics professionals.

The concept design for the for the urban station should include the flowing services that electric cars, eBikes, eScooter and electric vans users' demand:

- Parking and charging (ultrafast) for LEVs.
- Parking and charging for EVs.
- Lockers and courier service.
- Logistics.

# CWA 18091:2024 (E)

- Loading and unloading area.
- Restricted access: retractable bollards (pre-registered users).

The following picture shows and example of the concept design for the urban station.

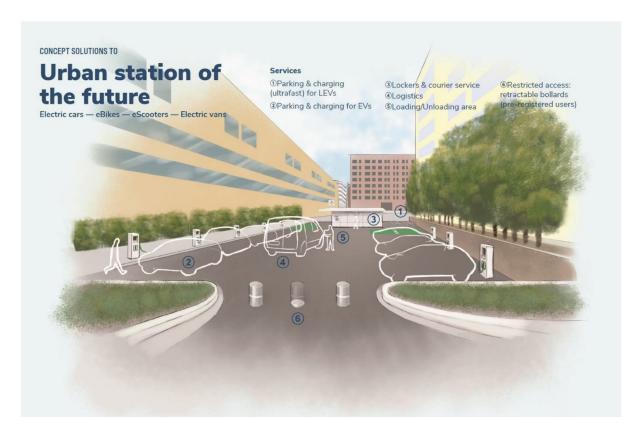


Figure 12 — Concept design for the Urban Station

According to stations' main features presented in Table 1 the following technologies should be included in the urban station concept design:

- Slow chargers (AC, DC).
- Fast chargers (DC).
- Parking and charging booking.
- (a)EVSE.
- Restricted access.
- Pay for charging (not parking), payment method interchangeable (credit cards; contactless payment; subscriptions, cash...).

The urban station should be located close to the city centre, neighbourhoods and shopping areas.

The following figure shows the main features of the urban station grouped in the three categories.

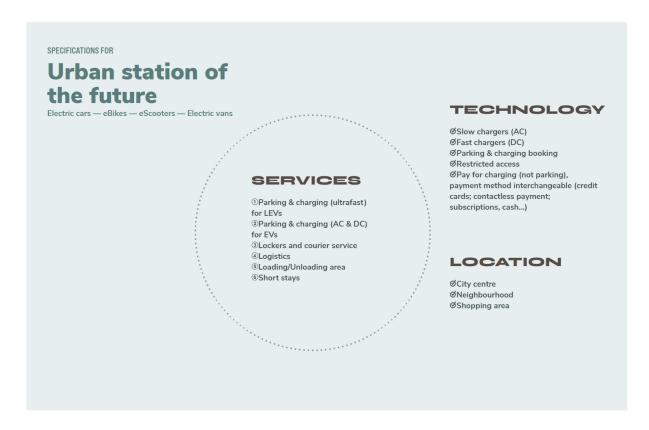


Figure 13 — Main features of the Urban station

According to the seven business models related to the charging process of EVs defined, the concept design of the Urban station does not match exactly with one of these business models, but the concept is related, at a different level, with various of these models.

From the business model point of view, the Urban station of the future is a logistic hub and a station offering services of park&charge and taxi. For this reason, a combination of several business is applicable.

- BM1 Logistics Hubs.
- BM3 City Centre (Park&Charge).
- BM5 e-Taxi Stops.

The following figure represents the CANVAS of the business model for the Urban Station highlighting the most relevant aspects.

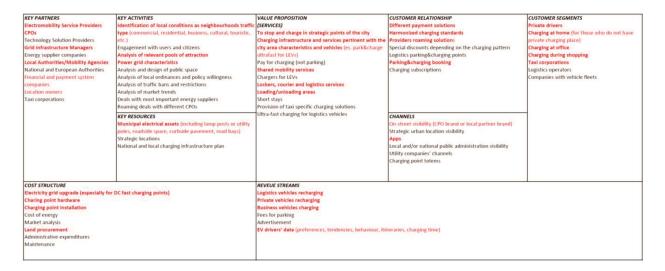


Figure 14 — Most relevant features of the combined BMs, considered in the Urban station concept

#### **8.1.1 Business**

The business represented in the upper left side of the CANVAS business model is composed by the key partners, activities and resources.

The key partners of the urban station are electromobility service providers, CPOs, grid infrastructure managers, local authorities and mobility agencies.

The main activities and resources of the urban station are identification of local conditions as neighbourhoods traffic type, analysis of relevant pools of attraction, power grid characteristics and municipal electrical assets.

### **8.1.2 Market**

The market represented in the upper right side of the business model chart is composed by the customer segments and relationship and the channels.

The market of the urban station is segmented in private drivers, charging at home, charging at office, charging during shopping and taxi corporations.

The most used channel of the urban station is through Apps and the different payment solutions, harmonized charging standards, providers roaming solutions and parking and charging booking are the basics of customer relationship.

#### 8.1.3 Flow

The flow represented in the lower boxes of the business model chart is composed by the revenue streams and the costs' structure.

The electricity grid upgrade, the charging point installation and hardware and the land procurement are the main costs' structure of the urban station.

The main sources of income of the urban station come from logistics and private vehicles recharging, business vehicles charging and EV drivers' data.

#### 8.1.4 Value

The value is represented in the central part of the CANVAS business model.

The main value that the urban station provides is to stop and charge in strategic locations in the city, charging infrastructure and services tailored to cities' features and to different vehicle models, shared mobility services lockers, courier and logistics services and loading and unloading areas.



Figure 15 — Business model related to the Urban station

# 9 Highway station

### 9.1 The sketch

This sketch presents a charging station to support the electromobility in the long range. The concept goes deeper in the idea of supplying different services to travellers who book a EV charge in a planned trip.

The concept design for the for the highway station should provide the flowing services that electric cars and electric vans users' demand:

- Fast chargers and parking lot.
- Vehicle maintenance.
- Shops.
- Fitness/Playground zone.
- Cafeteria.
- Toilets.

# CWA 18091:2024 (E)

- Playground.
- Coworking and resting area.

The following picture shows and example of the concept design for the highway station.



Figure 16 — Concept design for the Highway station

### 9.2 The main features

According to stations' main features presented in Table 1 the following technologies should be included in the highway station concept design:

- Fast chargers (DC).
- Booking of chargers.
- (a)EVSE.

The highway station locations require a big space. The location of the station should be integrated with the nature. The highway station should be located close to highways.

The following figure shows the main features of the highway station grouped in the three categories.



Figure 17 — Main features of the Highway station

### 9.3 The business model

According to the seven business models related to the charging process of EVs defined, the concept design of the Highway station does not match exactly with one of these business models, but the concept is related, at a different level, with various of these models.

From the business model point of view, the Highway station of the future is a station including additional services, a station for e-trucks, a station that is equipped with facilities to face special events (e.g. extreme climate episodes), and a station including services of mobile chargers. For this reason, a combination of several business is applicable.

- BM2 Citizen e Mobility Station.
- BM4 e-Trucks.
- BM6 Special Events.
- BM7 Mobile Charging Stations.

The following figure represents the CANVAS of the business model highlighting the most relevant aspects.

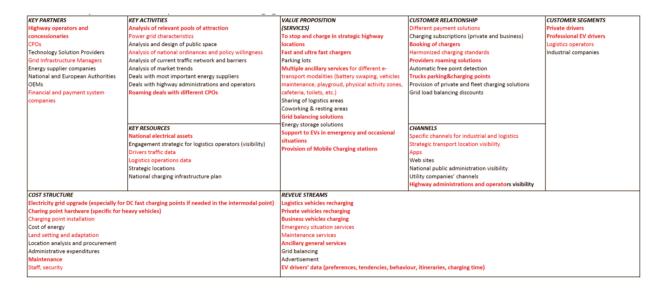


Figure 18 — Most relevant features of the combined BMs, considered in the Highway station concept

#### 9.3.1 Business

The business represented in the upper left side of the CANVAS business model is composed by the key partners, activities and resources.

The key partners of the highway station are highway operators and concessionaries, CPOs and grid infrastructure managers.

The main activities and resources of the highway station are analysis of relevant pools of attraction, power grid characteristics, roaming deals with different CPOs and national electrical assets.

#### 9.3.2 Market

The market represented in the upper right side of the business model chart is composed by the customer segments and relationship and the channels.

The market of the highway station is segmented in private drivers, professional EV drivers and logistics operators.

The most used channel of the highway station is through the highway administrations and operators' visibility and the booking of chargers, providers roaming solutions and parking and charging points for trucks are the basics of customer relationship.

### 9.3.3 Flow

The flow represented in the lower boxes of the business model chart is composed by the revenue streams and the costs' structure.

The electricity grid upgrade, the charging point hardware, the maintenance, the staff and the security are the main costs' structure of the highway station.

The main sources of income of the highway station come from logistics and private vehicles recharging, business vehicles charging, ancillary general services and the EV drivers' data.

#### 9.3.4 Value

The value is represented in the central part of the CANVAS business model.

The main value that the highway station provides is to stop and charge in strategic highway locations, fast and ultra-fast chargers, multiple ancillary services for different e-transport modalities, grid balancing solutions, energy storage solutions, emergency and ad-hoc support for EVs and provision of mobile charging stations.



Figure 19 — Business model of the Highway station

# 10 LEV chargers of the future

#### 10.1 The sketch

This sketch presents a charging station to support the active, multimodal and sustainable mobility. The concept combines the communal public transport with the particular transport, employing LEVs.

The concept design for the for the LEV chargers should provide the flowing services that eBikes and eScooter users' demand:

- Shelter and charger modules in underground stations
- Solar powered chargers in streetlamps in university campuses, parks...
- Solar powered chargers integrated in bus canopies, with vertical parking of LEVs

The following picture shows and example of the concept design for the LEV chargers.

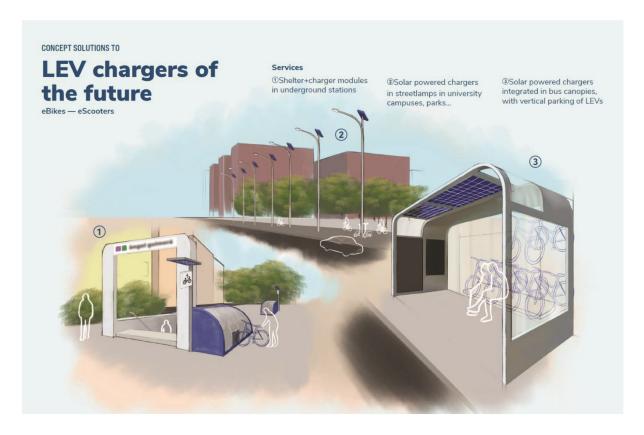


Figure 20 — Concept design of the LEV chargers

# 10.2 The main features

According to stations' main features presented in Table 1 the following technologies should be included in the LEV chargers concept design:

- Photovoltaic panels connected to grid.
- Modularity.
- Battery storage cabinets.
- Battery swapping.
- AC chargers.
- Charging booking.

The LEV chargers should be located close to university campuses and be integrated into bus canopies or underground stations.

Chargers should be installed in urban furniture, streetlamps and benches.

The following figure shows the main features of the LEVs chargers grouped in the three categories.

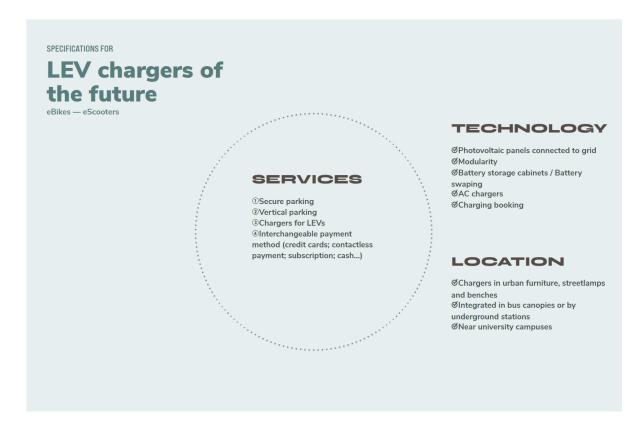


Figure 21 — Main features of the LEV chargers

# 10.3 The business model

According to the seven business models related to the charging process of EVs defined, the concept design of the LEV chargers does not match exactly with one of these business models, but the concept is related, at a different level, with various of these models.

From the business model point of view, the LEV chargers of the future is a station including intermodal mobility and services of park&charge. For this reason, a combination of several business is applicable

- BM2 Citizen e Mobility Station.
- BM3 City Centre (Park&Charge).

The following figure represents the CANVAS of the business model for the LEV chargers highlighting the most relevant aspects.

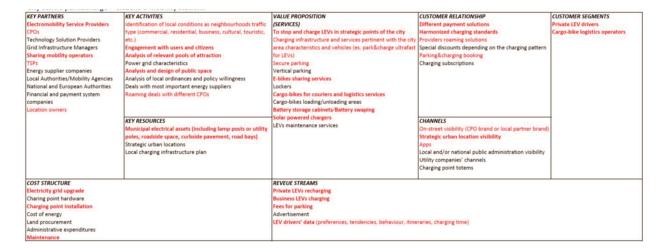


Figure 22 — Most relevant features of the combined BMs, considered in the LEV chargers concept

#### 10.3.1 Business

The business represented in the upper left side of the CANVAS business model is composed by the key partners, activities and resources.

The key partners of LEV chargers are electromobility service providers, CPOs, sharing mobility operators and location owners.

The main activities and resources of LEV chargers are engagement with users and citizens, analysis of relevant pools of attraction, analysis and design of public space and municipal electrical assets.

#### 10.3.2 Market

The market represented in the upper right side of the business model chart is composed by the customer segments and relationship and the channels.

The market of the LEV chargers is segmented in private LEV drivers and cargo-bike logistics operators.

The most used channel of the LEV chargers is through Apps and the different payment solutions, harmonized charging standards, providers roaming solutions and strategic urban location visibility are the basics of customer relationship.

#### 10.3.3 Flow

The flow represented in the lower boxes of the business model chart is composed by the revenue streams and the costs' structure.

The electricity grid upgrade, the charging point installation and the maintenance are the main costs' structure of the LEV chargers.

The main sources of income of the LEV chargers come from private LVEs recharging, business LVEs charging, fees for parking and LEV drivers' data.

#### 10.3.4 Value

The value is represented in the central part of the CANVAS business model.

The main value that the LEV chargers provide is to stop and charge LVEs in strategic locations in the city, charging infrastructure and services tailored to cities specific features and to different vehicle models, secure parking, eBikes sharing services, cargo-bikes for couriers and logistics services, loading and unloading areas, battery storage cabinets, battery swapping and solar powered chargers.

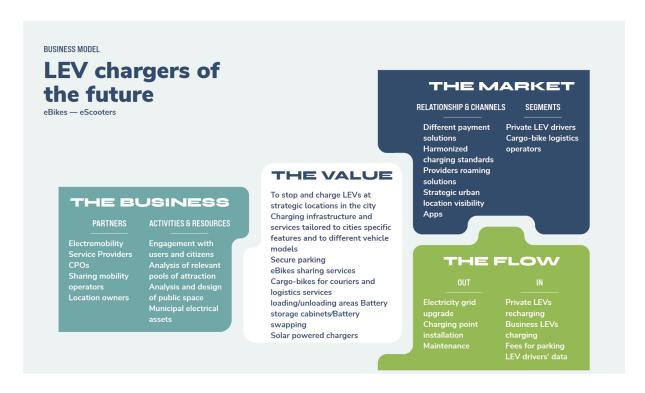


Figure 23 — Business model of the LEV chargers

# **Bibliography**

- [1] D8. 8 Business Model Validation Results (I), https://www.userchi.eu/wp-content/uploads/2022/04/D8.8-Business-model-validation-resultsI.pdf. (Accessed on April 2023)
- [2] OSTERWALDER. A., PIGNEUR, Y., Business model generation. John Wiley&Sons, 2010